

LIQUID DIFFERENTIAL PRESSURE TRANSMITTERS 0-10VDC 4-20mA

These units can be used to measure pressure or differential pressure of water, diesel oil, up to 30% glycol or other neutral fluids across pumps, boilers, chillers, valves etc. The 0-10vdc output signal is linear across the range. Suitable for heating, air conditioning and building management systems. For liquid levels 1m depth of water = 100mbar.

EWDT..




Load : 0-10vdc > 10kΩ
 4-20mA ≤ (supply -11v) ÷ 0.02A = ohm
 Response time <10ms
 Enclosure Flammability : UL94-V0 Max. ambient : 80°C

EWDT..
 Max consumption <35mA Accuracy <1.0%
 Ceramic sensor
 The pressure line can be formed into a U shape/syphon for media temperatures up to *300°C.

Type	Range	Max Press.	Supply ± 10%	Output Signal	Max Media Temp °C	Media Contact Materials	Pressure Connections	Enclosure
EWDT-001	0/100 mbar	0.6 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-002	0/200 mbar	1.2 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-025	0/250 mbar	1.2 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-004	0/400 mbar	2 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-005	0/500 mbar	3 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-006	0/600 mbar	3 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-1	0/1 bar	6 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-1.6	0/1.6 bar	12 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-2.5	0/2.5 bar	12 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-4	0/4 bar	12 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-6	0/6 bar	12 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65
EWDT-10	0/10 bar	20 Bar	24VAC/DC	0-10 vdc	-15/+80*	Ceramic/Stainless Steel	6mm Compression	IP65

OPTIONAL: EWDT..MA 4-20mA output 2 wire loop

DIMENSIONS:

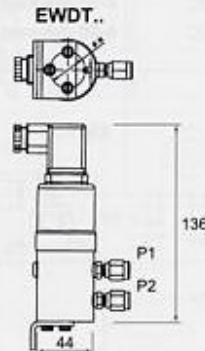

ACCESSORIES:

- EE-CT6 Copper tube 6mm OD x 10m for Pressure Switches and Transmitters
- EE-MC1 Brass Male Compression fitting for 6mm OD tube x 1/8" BSP Male
- EE-MC2 Brass Male Compression fitting for 6mm OD tube x 1/4" BSP Male



WIRING:



Min sensor / control signal cable size 7/0.2mm
 Screened cable is recommended. Max cable length 100m

Keep away from power cables/units which may cause interference.
 The screen should be earthed at controller end only.

INSTALLATION:

EWDT..



Mounting at any angle is possible