


## 2. NM-4

### Product Information

### Damper actuators

NM

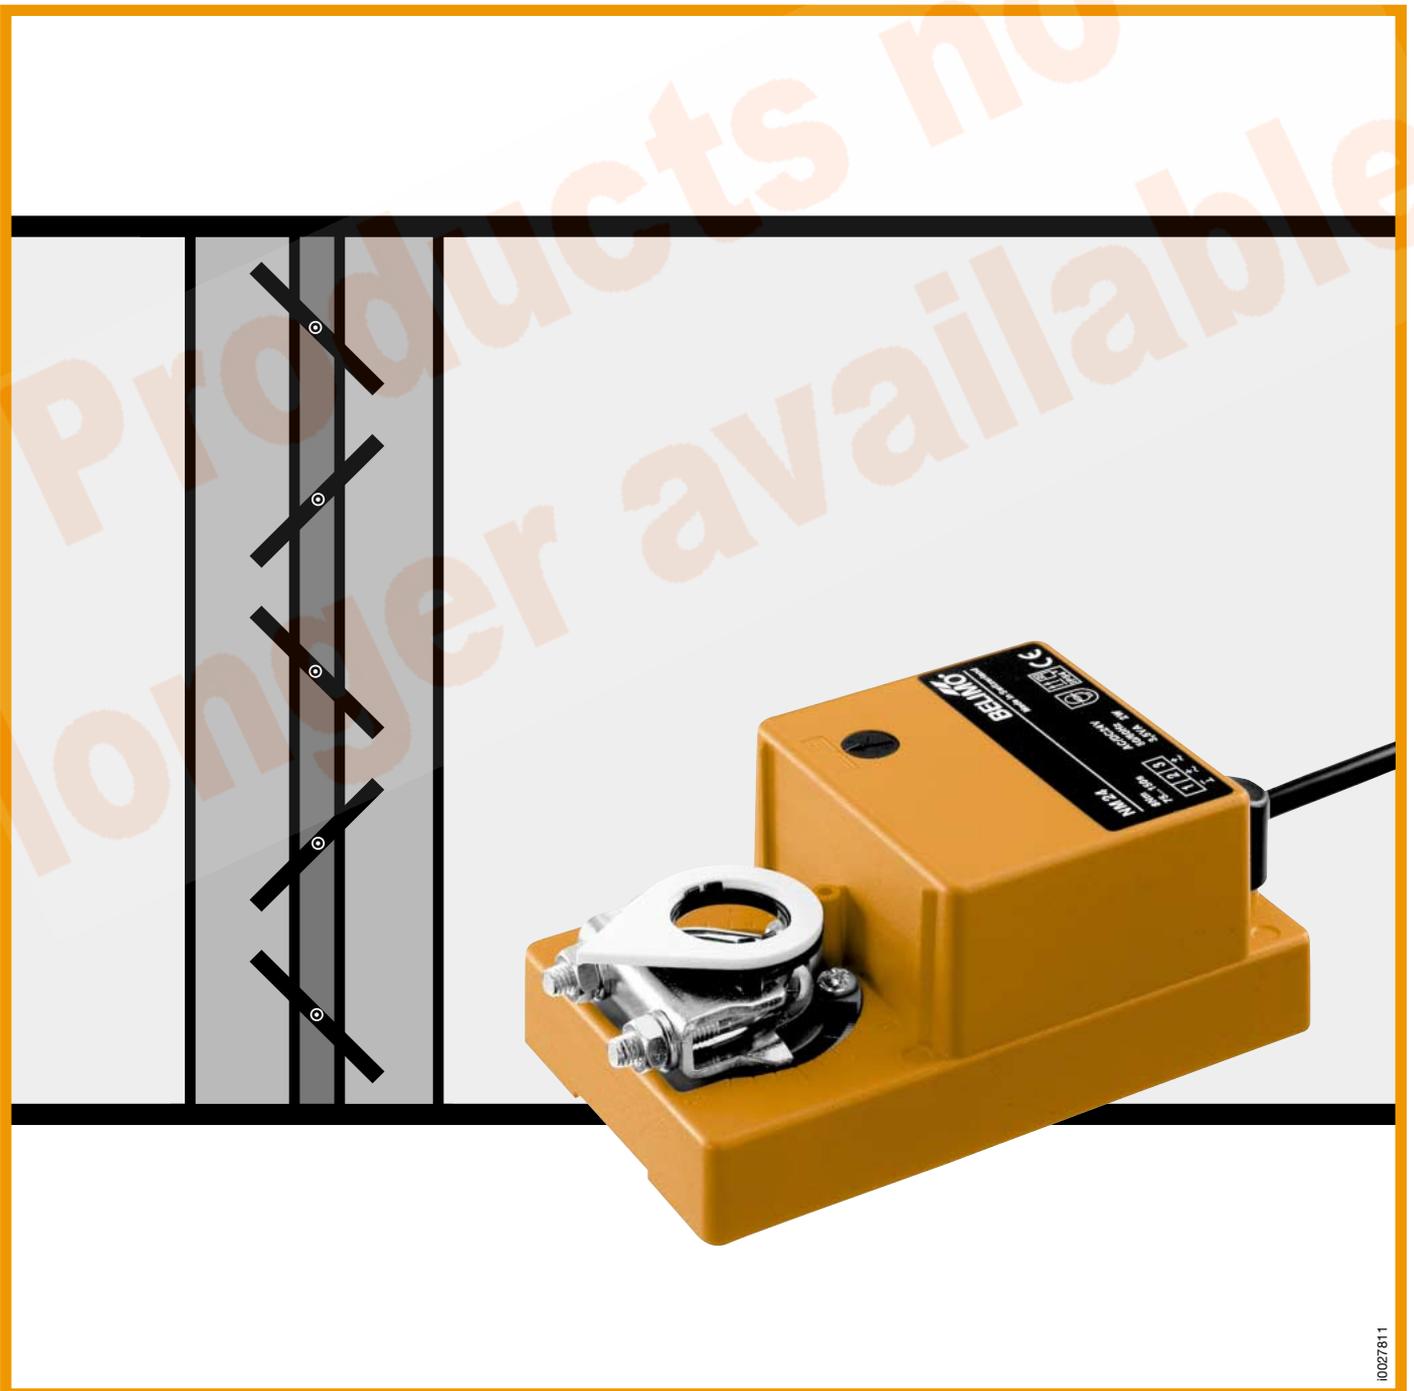

## The complete range of damper actuators for general use in HVAC systems

Type	LM	NM	SM	AM	GM	LF	AF(R)
Torque	4 Nm	8 Nm	15 Nm	18 Nm	30 Nm	4 Nm	15 Nm
Spring return function	-	-	-	-	-		
For dampers up to approx.	0.8 m <sup>2</sup>	1.5 m <sup>2</sup>	3 m <sup>2</sup>	3.6 m <sup>2</sup>	6 m <sup>2</sup>	0.8 m <sup>2</sup>	3 m <sup>2</sup>

For more information, please contact your Belimo Representative or order any brochures you need by fax.

Fax to: **BELIMO** (address overleaf)

Please send us product brochures on the following damper actuators:

LM...  SM...  AM...  GM...  LF...  AF...  AFR...  Electrical accessories

Please also send information on:

- Motorized fire and smoke dampers
- Variable air-volume control (VAV-Control)
- Rotary-motion actuators and valves
- Linear-motion actuators and valves

Please call us back

**Sender**

Company: \_\_\_\_\_

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Post code: \_\_\_\_\_

Country: \_\_\_\_\_

Tel.: \_\_\_\_\_

Fax: \_\_\_\_\_

E-Mail: \_\_\_\_\_

Date: \_\_\_\_\_

## Selection table

		NM24	NM230	NM24-SR	NM24-SRS
Torque	8 Nm				
Nominal voltage	AC 24 V DC 24 V AC 230 V	•	•	•	•
Running time	75...150 s 150 s	•	•	•	•
Control	Open/Close    Single-wire 2-wire Modulating      DC 0...10 V	•	•	•	•
Direction of rotation reversible	(right/left)	•	•	•	•
Manual operation by pushbutton		•	•	•	•
Mechanical angle of rotation limiting		•	•	•	•
Automatic angle of rotation and running time adjustment				•	•
Continuous position feedback				•	•
Adjustable electrical working range					•
Damper rotation with universal spindle clamp		•	•	•	•

Actuators with damper rotation for square form-fit spindles (8 mm) and conforming to US standards on request.

### Damper actuators, Open/Close

**NM24** 4

**NM230** 5

### Damper actuators, modulating

**NM24-SR** 6

**NM24-SRS** 7

**Control and monitoring functions** 8

### Electrical accessories

**Auxiliary switches SN1, SN2** 9

### Mounting instructions

**Damper actuators** 10

**Auxiliary switches** 10

## Note

### Using BELIMO damper actuators

The actuators listed in this catalogue are intended for the operation of air dampers in HVAC systems.

### Torque requirements

When calculating the torque required to operate dampers, it is essential to take into account all the data supplied by the damper manufacturer concerning cross sectional area, design, mounting and air flow conditions.



p0004803

**Dampers up to approx. 1.5 m<sup>2</sup>**

**Open/Close actuator (AC/DC 24 V)**

**Reversible**

**Improved functional safety**

The damper actuator has no limit switches and is overload-proof. It stops automatically when it reaches the damper or actuator end stop.

**Easy functional check**

A functional check of damper operation is simplicity itself: the gearing can be disengaged by simply pressing a pushbutton on top of the case. While the pushbutton remains depressed, the damper can be operated by hand.

**Simple installation**

The damper actuator is fitted with a universal spindle clamp for quick and easy mounting directly on the damper spindle. The actuator is supplied with an anti-rotation strap for fixing it in position.

**Electrical accessories**


SN1, SN2 Auxiliary switches, page 9

**Mounting instructions, page 10**

**Important**


Read the notes about the use and torque requirements of the damper actuators on page 3.

**Wiring diagram**

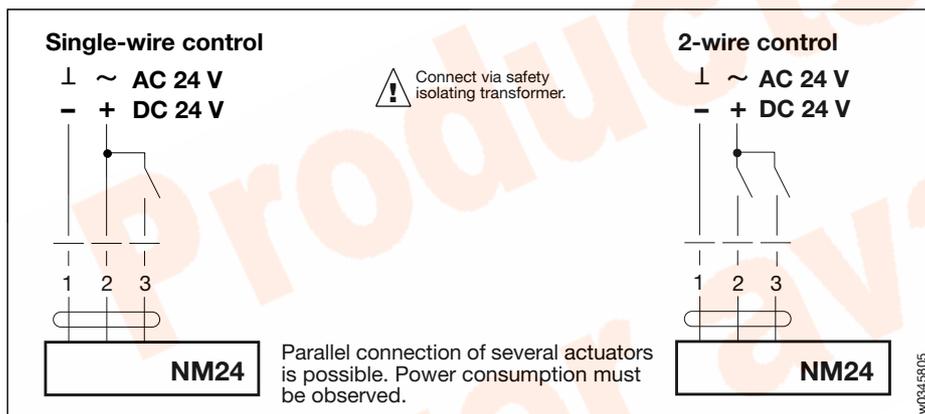

Technical data	NM24
Nominal voltage	AC 24 V 50/60 Hz, DC 24 V
Nominal voltage range	AC/DC 19.2...28.8 V
For wire sizing	3.5 VA
Power consumption	2 W
Connecting cable	1 m long, 3×0.75 mm <sup>2</sup>
Direction of rotation	selected with L/R switch
Torque	min. 8 Nm (at rated voltage)
Angle of rotation	max. 95° (adjustable by mechanical stops)
Running time	75...150 s (0...8 Nm)
Sound power level	max. 35 dB (A)
Position indication	mechanical
Protection class	⊡ (safety low voltage)
Degree of protection	IP 54 (bottom cable entry)
Ambient temperature range	-20... +50 °C
Non-operating temperature	-40... +80 °C
Humidity test	to EN 60335-1
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Maintenance	maintenance free
Weight	800 g

**Dimensions**

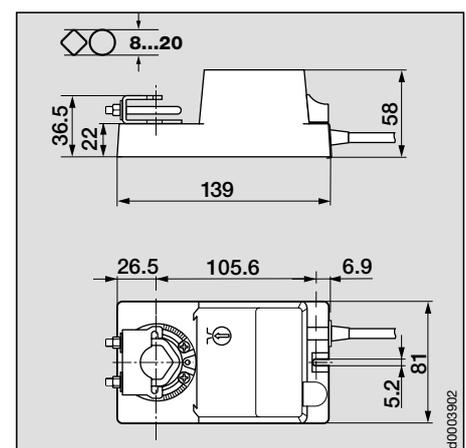



**Dampers up to approx. 1.5 m<sup>2</sup>**  
**Open/Close actuator (AC 230 V)**  
**Control by single-pole contact (single-wire control)**

**Improved functional safety**

The damper actuator has no limit switches and is overload-proof. It stops automatically when it reaches the damper or actuator end stop.

**Easy functional check**

A functional check of damper operation is simplicity itself: the gearing can be disengaged by simply pressing a pushbutton on top of the case. While the pushbutton remains depressed, the damper can be operated by hand.

**Simple installation**

The damper actuator is fitted with a universal spindle clamp for quick and easy mounting directly on the damper spindle. The actuator is supplied with an anti-rotation strap for fixing it in position.

**Electrical accessories**


SN1, SN2 Auxiliary switches, page 9

**Mounting instructions, page 10**

**Important**


Read the notes about the use and torque requirements of the damper actuators on page 3.

**Wiring diagram**

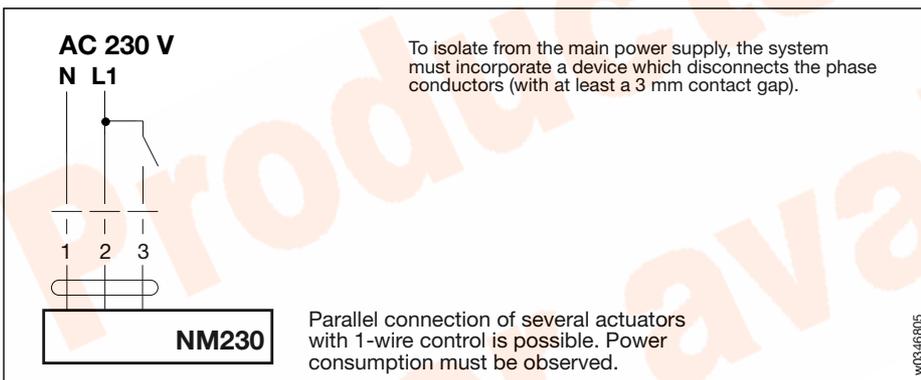

Technical data	NM230
Nominal voltage	AC 230 V 50/60 Hz
Nominal voltage range	AC 198... 264 V
For wire sizing	18 VA
Power consumption	2 W
Connecting cable	1 m long, 3×0.75 mm <sup>2</sup>
Direction of rotation	selected with L/R switch
Torque	min. 8 Nm (at rated voltage)
Angle of rotation	max. 95° (adjustable by mechanical stops)
Running time	75... 150 s (0... 8 Nm)
Sound power level	max. 35 dB (A)
Position indication	mechanical
Protection class	II (all insulated)
Degree of protection	IP 54 (bottom cable entry)
Ambient temperature range	- 20... + 50 °C
Non-operating temperature	- 40... + 80 °C
Humidity test	to EN 60335-1
EMC Low Voltage Directive	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC CE according to 73/23/EEC
Maintenance	maintenance free
Weight	800 g


**Dimensions**

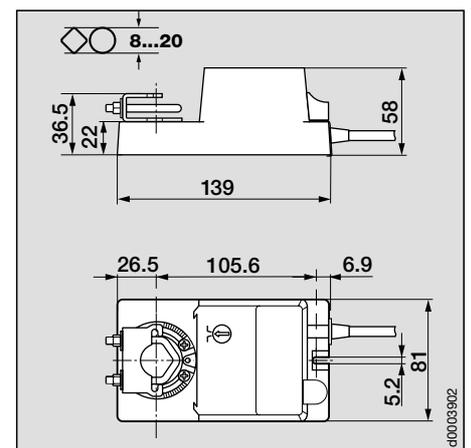



p0006803

## Wiring diagram

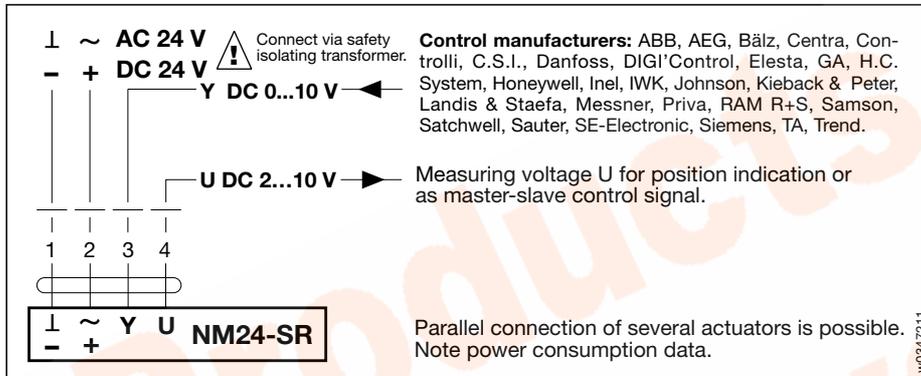

w00947211

Technical data	NM24-SR
Nominal voltage	AC 24 V 50/60 Hz, DC 24 V
Nominal voltage range	AC 19.2...28.8 V, DC 21,6...28.8 V
For wire sizing	3 VA
Power consumption	1.3 W running, 0.5 W at rest
Connecting cable	1 m long, 4×0.75 mm <sup>2</sup>
Control signal Y	DC 0...10 V @ input resistance = 100 kΩ
Operating range	DC 2...10 V (for 0...100% angle of rotation)
Measuring voltage U	DC 2...10 V @ ≤ 0.7 mA (for 0...100% angle of rotation)
Synchronisation tolerance	± 5%
Override control	Y open or 0 V = 0% angle of rotation Y at AC 24 V = 100% angle of rotation
Direction of rotation (at Y = 0 V)	selected with L/R switch at switch position L ↶ resp. R ↷
Torque	min. 8 Nm (at rated voltage)
Angle of rotation	max. 95° (adjustable by mechanical stops)
Running time	150 s, regardless of the mechanically limited angle of rotation from 0...35° ↶ to 0...95° ↷
Sound power level	max. 35 dB (A)
Position indication	mechanical
Protection class	⚡ (safety low voltage)
Degree of protection	IP 54 (bottom cable entry)
Ambient temperature range	-20... +50 °C
Non-operating temperature	-40... +80 °C
Humidity test	to EN 60335-1
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Maintenance	maintenance free
Weight	900 g

Dampers up to approx. 1.5 m<sup>2</sup>

Modulating damper actuator (AC/DC 24 V)

Control DC 0...10 V and position feedback DC 2...10 V

Self-adapting, automatic angle of rotation and running time adjustment

### Improved functional safety

The damper actuator has no limit switches and is overload-proof. It stops automatically when it reaches the damper or actuator end stop.

### Automatic commissioning, easy functional check

When the power supply is first switched on, or when the override push button is pressed, the actuator performs an automatic function test. It runs to each end position and, in the process, adapts its electrical working range of DC 2...10 V and running time of 150 s to the effective mechanical angle of rotation of the damper. After performing this function, the actuator moves to the position demanded by the positioning signal.

A functional check of damper operation is simplicity itself: the gearing can be disengaged by simply pressing a push-button on top of the case. While the pushbutton remains depressed, the damper can be operated by hand.

### Simple installation

The damper actuator is fitted with a universal spindle clamp for quick and easy mounting directly on the damper spindle. The actuator is supplied with an anti-rotation strap for fixing it in position.

### Electrical accessories \*(see Doc. 2. Z-...)

- SN1, SN2 Auxiliary switches, page 9
- \*SG...24 Positioners
- \*ZAD24 Digital position indicator


### Control and monitoring functions, page 8

### Mounting instructions, page 10

### Important

Read the notes about the use and torque requirements of the damper actuators on page 3.

### Dimensions

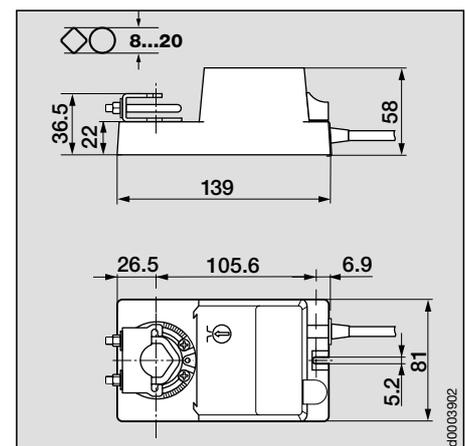

d00003902



p0007803

Dampers up to approx. 1.5 m<sup>2</sup>  
**Modulating damper actuator (AC 24 V)**

**Control DC 0...10 V (DC 8...18 V) and position feedback DC 2...10 V**

**Adjustable electrical working range**

**Self-adapting, automatic angle of rotation and running time adjustment**

**Improved functional safety**

The damper actuator has no limit switches and is overload-proof. It stops automatically when it reaches the damper or actuator end stop.

**Automatic commissioning, easy functional check**

When the power supply is first switched on, or when the override push button is pressed, the actuator performs an automatic function test. It runs to each end position and, in the process, adapts its electrically defined working range and running time of 150 s to the effective mechanical angle of rotation of the damper. After performing this function, the actuator moves to the position demanded by the positioning signal.

A functional check of damper operation is simplicity itself: the gearing can be disengaged by simply pressing a push-button on top of the case. While the pushbutton remains depressed, the damper can be operated by hand.

**Simple installation**

The damper actuator is fitted with a universal spindle clamp for quick and easy mounting directly on the damper spindle. The actuator is supplied with an anti-rotation strap for fixing it in position.

**Electrical accessories** \*(see Doc. 2. Z-...)

SN1, SN2 Auxiliary switches, page 9

\*SG...24 Positioners

\*ZAD24 Digital position indicator


**Control and monitoring functions, page 8**

**Mounting instructions, page 10**

**Important**


Read the notes about the use and torque requirements of the damper actuators on page 3.

**Dimensions**

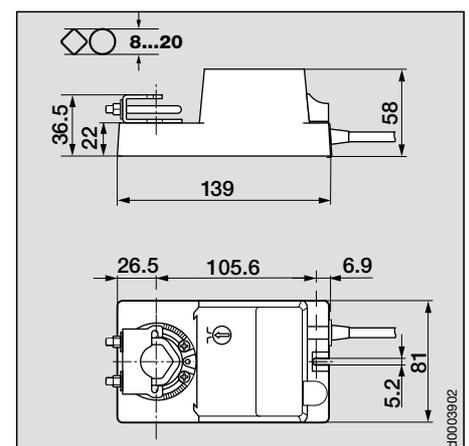


d0003902

## Wiring diagram

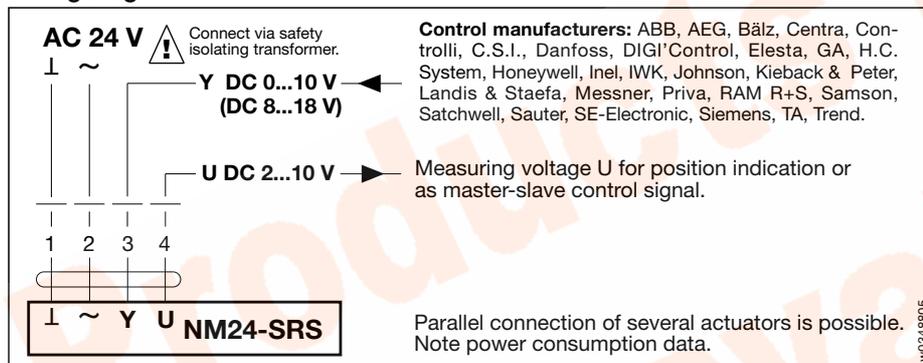


Technical data	NM24-SRS
Nominal voltage	AC 24 V 50/60 Hz
Nominal voltage range	AC 19.2...28.8 V
For wire sizing	3 VA
Power consumption	1.3 W running, 0.5 W at rest
Connecting cable	1 m long, 4×0.75 mm <sup>2</sup>
Control signal Y	DC 0...18 V @ input resistance = 100 kΩ
Starting point U <sub>0</sub>	adjustable DC 0...8 V
Span ΔU	adjustable DC 2...10 V (for 0...100% angle of rotation)
Factory setting	U <sub>0</sub> = DC 0 V, ΔU = DC 10 V
Measuring voltage U	DC 2...10 V @ ≤ 0.7 mA (for 0...100% angle of rotation)
Synchronisation tolerance	± 5%
Override control	Y open or 0 V = 0% angle of rotation Y at AC 24 V = 100% angle of rotation
Direction of rotation (at Y = 0 V)	selected with L/R switch at switch position L ↶ resp. R ↷
Torque	min. 8 Nm (at rated voltage)
Angle of rotation	max. 95° (adjustable by mechanical stops)
Running time	150 s, regardless of the mechanically limited angle of rotation from 0...35° ↶ to 0...95° ↶
Sound power level	max. 35 dB (A)
Position indication	mechanical
Protection class	⊠ (safety low voltage)
Degree of protection	IP 54 (bottom cable entry)
Ambient temperature range	-20... +50 °C
Non-operating temperature	-40... +80 °C
Humidity test	to EN 60335-1
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Maintenance	maintenance free
Weight	900 g

## Remote control 0...100%

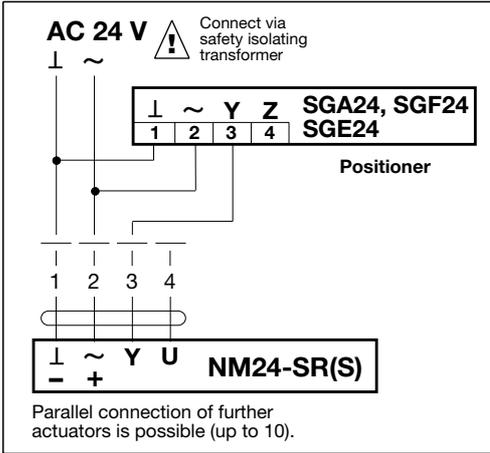


## Minimum position

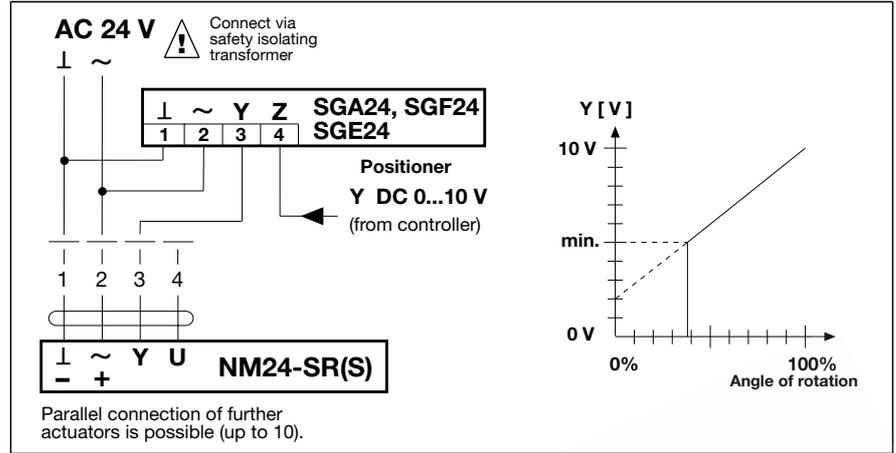


w0348211


## Override control

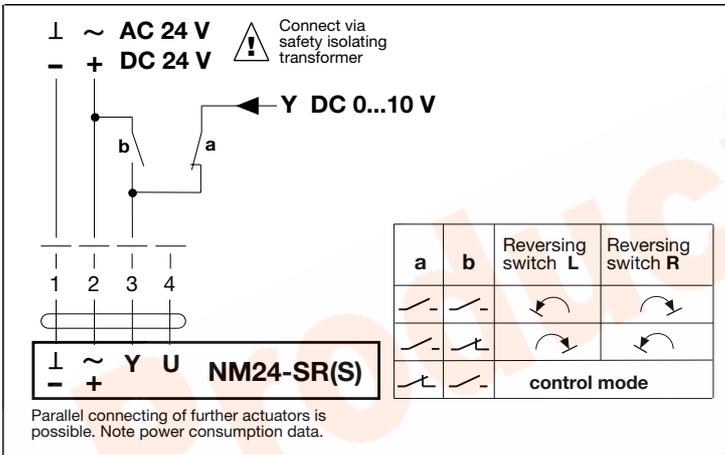


## Position indication

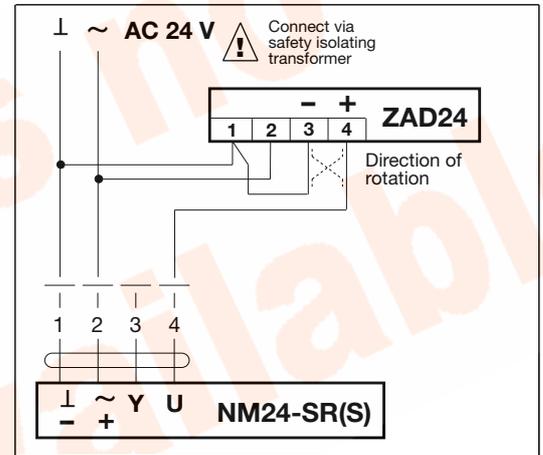

## Master-slave control (depending on position)

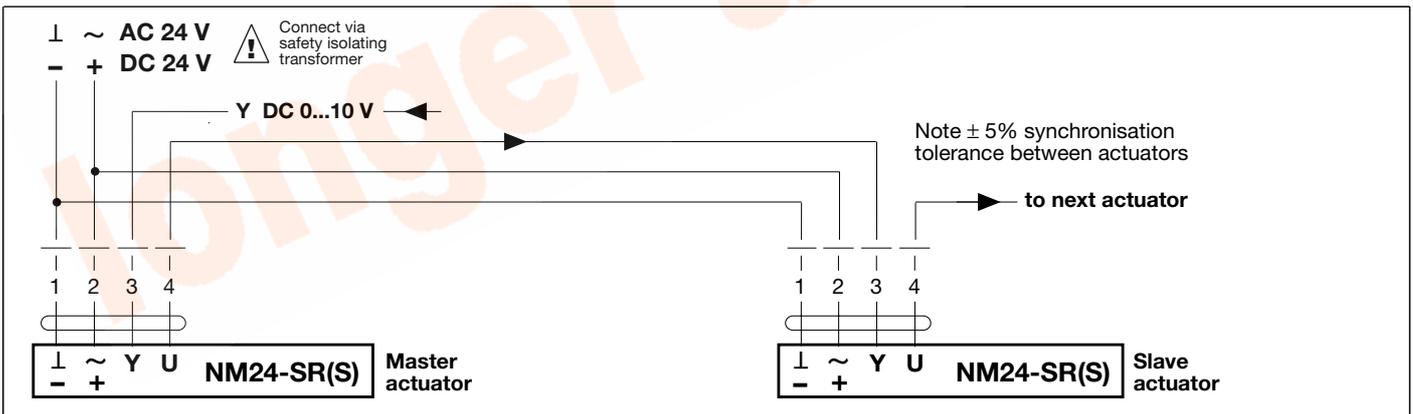

## Function monitoring

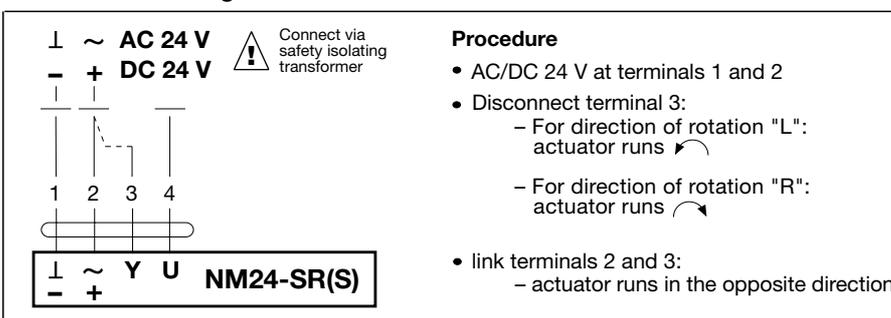

Type NM24-SRS doesn't work with DC 24 V.



pd008707

**Compatible with NM... damper actuators**

**Application**

The auxiliary switch units SN1 and SN2 are designed to fit damper actuators from the NM range and are intended for the signalling of end positions or for performing switching functions at any angular position.

**Mode of operation**

A driver disk is positively attached to the spindle clamp so that there is a direct link between its position and the microswitch operating cams.

The switching points can be set anywhere in the range from 0 to 10 by means of a dial. The switch position can be read off at any time.


**Installation**

The auxiliary switch units plug directly on to the spindle clamp of the NM... damper actuators. The guide slots between the housing and the switch unit ensure proper location. The unit is secured to the motor housing with a prefitted screw.

**Note**


Instructions for fitting and setting the switches will be found on page 10.

**Wiring diagram**

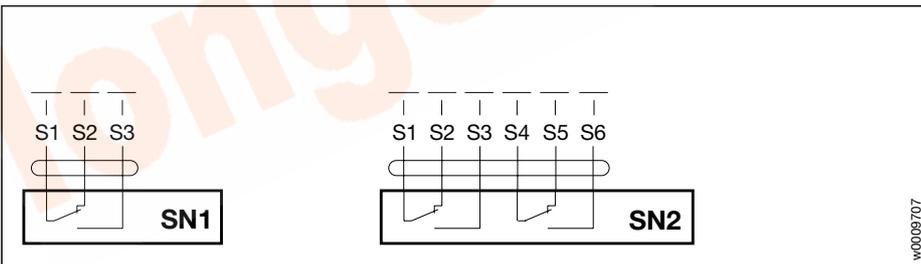


wd008707


Technical data	SN1	SN2
Number of switches	1×SPDT	2×SPDT
Switching capacity	6 A (2.5 A) AC 250 V	
Connecting cable	1 m, 3×0.75 mm <sup>2</sup>	1 m, 6×0.75 mm <sup>2</sup>
Switching point	Adjustable over full actuator rotation 0...10 Pre-setting by scale possible	
Protection class	II (all-insulated)	
Degree of protection	IP 54	
Ambient temperature range	-30... +50 °C	
Non-operating temperature	-40... +80 °C	
Humidity test	to EN 60335-1	
Weight	125 g	175 g

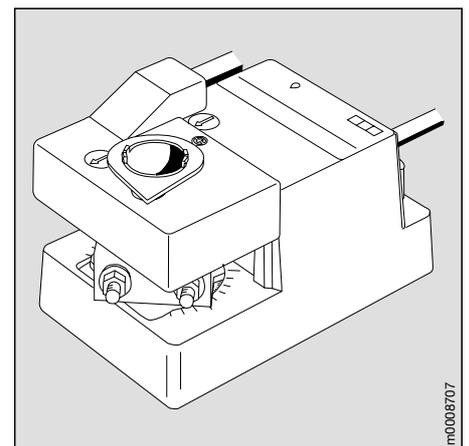

md008707

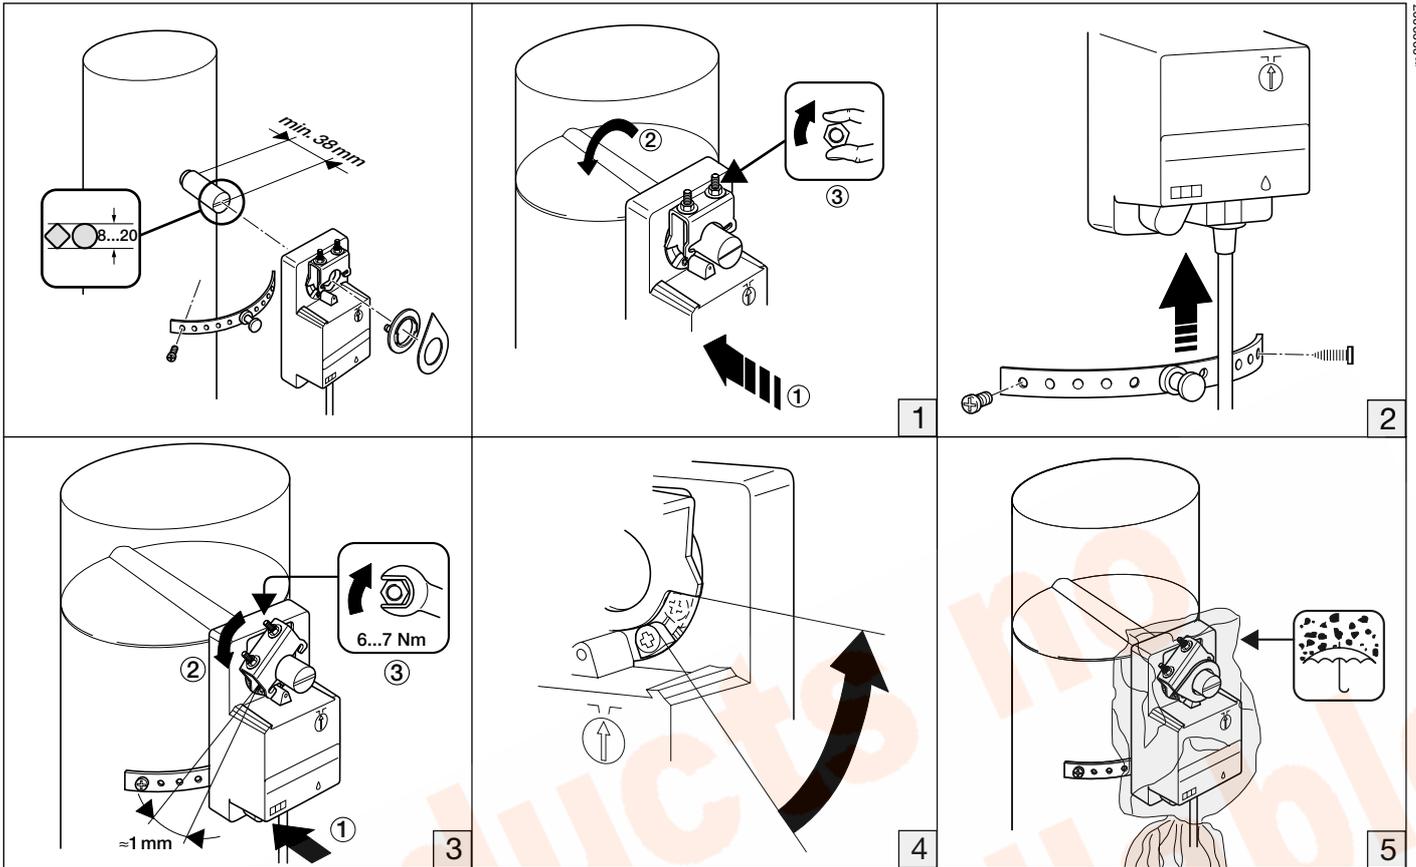

# Mounting instructions for auxiliary switches SN1, SN2

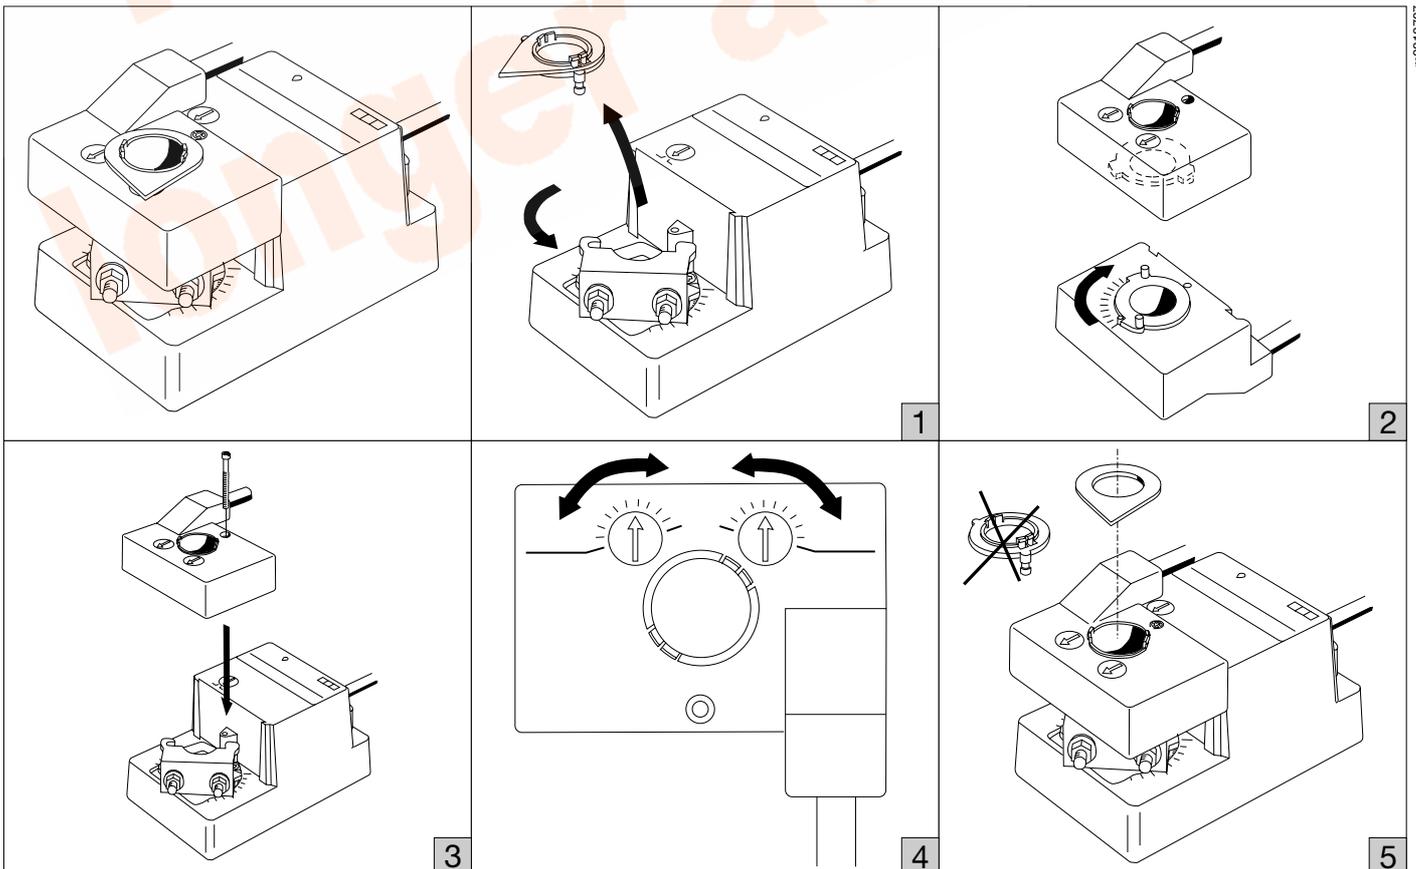



## Air applications



Standard actuators and spring-return actuators for air control dampers in HVAC systems



Safety actuators for motorizing fire and smoke extraction dampers



VAV systems for individual room air control

## Water applications



Mixing actuators and motorized ball valves for HVAC water circuits



Globe valves and intelligent linear actuators – also for leading makes of valve

# Innovation, Quality and Consultancy: A partnership for motorizing HVAC actuators

Contact the following for further information:

### Belimo Headquarters

CH BELIMO Holding AG  
Brunnenbachstrasse 1  
8340 Hinwil, Switzerland  
Tel. +41 (0)43 843 61 11  
Telefax +41 (0)43 843 62 68  
E-Mail: info@belimo.ch  
Internet: www.belimo.ch

### Belimo Subsidiaries

AT/ BELIMO Automation  
HR/ Handelsgesellschaft m.b.H.  
HU/ Geiselbergstrasse 26-32  
SK/ 1110 Wien, Austria  
SL Tel. +43 (0)1 749 03 61-0  
Telefax +43 (0)1 749 03 61-99  
E-Mail: info@belimo.at

AU BELIMO Actuators Pty. Ltd.  
Unit 10, 266 Osborne Avenue  
Clayton South, VIC 3169  
Australia  
Tel. +61 (0)3 9551 0201  
Telefax +61 (0)3 9551 0215  
E-Mail: belimo@belimoactuators.com

CA BELIMO Aircontrols (CAN), Inc.  
5716 Coopers Ave., Units 14&15  
Mississauga, Ontario L4Z 2E8  
Canada  
Tel. +1 (1)905 712 31 18  
Telefax +1 (1)905 712 31 24  
E-Mail: webmaster@belimo.com

CH BELIMO Automation AG  
Sales Switzerland  
Brunnenbachstrasse 1  
8340 Hinwil, Switzerland  
Tel. +41 (0)43 843 62 12  
Telefax +41 (0)43 843 62 66  
E-Mail: info@belimo.ch  
Internet: www.belimo.ch

DE BELIMO Stellantriebe  
Vertriebs GmbH  
Weifenstr. 27, Postfach 72 02 30  
70599 Stuttgart, Germany  
Tel. +49 (0)711 1 67 83-0  
Telefax +49 (0)711 1 67 83-73  
E-Mail: info@belimo.de  
Internet: http://www.belimo.de

ES BELIMO Ibérica  
de Servomotores, S.A.  
C/San Romualdo, 12-14  
28037 Madrid, Spain  
Tel. +34 91 304 11 11  
Telefax +34 91 327 25 39  
E-Mail: info@belimo.es

FR BELIMO Servomoteurs  
Z.A. de Courtry  
33, Rue de la Régale  
77181 Courtry, France  
Tel. +33 (0)1 64 72 83 70  
Telefax +33 (0)1 64 72 94 09  
E-Mail: mail@belimo.fr

GB BELIMO Automation UK Limited  
The Lion Centre  
Hampton Road West  
Feltham, Middlesex, Great Britain  
TW 13 6DS  
Tel. +44 (0)20 8755 4411  
Telefax +44 (0)20 8755 4042  
E-Mail: belimo@belimo.co.uk

HK BELIMO Actuators Ltd.  
Room 208, 2/F  
New Commerce Centre  
19 On Sum Street, Shtatin, N.T.  
Hong Kong  
Tel. +852 26 87 17 16  
Telefax +852 26 87 17 95  
E-Mail: info@belimo.com.hk

PL BELIMO Słowniki S.A.  
ul. Zagadki 21  
02-227 Warszawa, Poland  
Tel. +48 (0)22 886 53 05  
Telefax +48 (0)22 886 53 08  
E-Mail: info@belimo.pl

SG BELIMO Actuators Pte Ltd  
2, Jurong East Street 21  
#04-31F IMM Building  
Singapore 609601  
Tel. +65 6564 9828  
Telefax +65 6564 9038  
E-Mail: info@belimo.com.sg

US BELIMO Aircontrols (USA), Inc.  
43 Old Ridgebury Road  
P.O. Box 2928  
Danbury, CT 06810 USA  
Tel. +1 (1)203 792 29 67  
Telefax +1 (1)203 792 29 67  
E-Mail: webmaster@belimo.com  
Internet: www.belimo.com

### Belimo Representatives and Agencies

AE BELIMO Automation  
Middle East Office  
P.O. Box 55427  
Dubai, U.A.E.  
Tel. +971 (0)4 387 417  
Telefax +971 (0)4 387 415  
E-Mail: belimome@emirates.net.ae

BG BELIMO Bulgaria Ltd.  
j.k. Lagera, 3 Smolyanska Str.  
bl. 56, entr. B, ap. 50  
1612 Sofia, Bulgaria  
Tel. +3592 952 3470/1  
Telefax +3592 545 995  
E-Mail: belimo@intech.bg

CN BELIMO Automation Ltd.  
18 FA3, 585 Longhua West-Road  
200232 Shanghai, China  
Tel. +86 21 6469 2935  
Telefax +86 21 6469 2909  
E-Mail: shanghai@belimo.com.hk

CN BELIMO Beijing  
Rm 605, Beijing Hai Chang  
Edifice, 44, Liang Ma Qiao Road  
Chao Yang District  
100016 Beijing, China  
Tel. +86 10 6462 1382  
Telefax +86 10 6462 1383  
E-Mail: beijing@belimo.com.hk

CY R.E.S. Ltd.  
P.O. Box 8297  
Nicosia, Cyprus  
Tel. +357 (0)2 51 10 07  
Telefax +357 (0)2 49 65 47  
E-Mail: reliance@spidernet.com.cy

CZ BELIMO CZ (Ing. Ivar Mentzl)  
Charkovská 16  
10100 Praha 10, Czech Republic  
Tel. +420 (0)2 717 4 0 311  
Telefax +420 (0)2 717 43 057  
E-Mail: info@belimo.cz

DK BELIMO A/S  
Thomas Helstedsevej 7A  
8660 Skanderborg, Denmark  
Tel. +45 86 52 44 00  
Telefax +45 86 52 44 88  
E-Mail: info@belimo.dk

EE BELIMO Balticum AS  
Tõri 10 d  
11313 Tallinn, Estonia  
Tel. +372 6 140 811  
Telefax +372 6 140 812  
E-Mail: info@belimo.ee

FI Oy Suomen BELIMO Ab  
Insinöörikatu 2  
00880 Helsinki, Finland  
Tel. +358 (0)9 75 11 65 00  
Telefax +358 (0)9 75 11 65 31  
E-Mail: belimo@belimo.fi

GR BELIMO Air Controls  
29, Tagm. Plessa, Kallithea  
GR 17674 Athens, Greece  
Tel. +30 (2)10 94 00 766  
Telefax +30 (2)10 94 00 767  
E-Mail: belimogr@tee.gr

IE Safegard Systems Ltd.  
Systems House, Unit 34  
Southern Cross Business Park  
Bray, Co Wicklow, Ireland  
Tel. +353 (0)1 2761 600  
Telefax +353 (0)1 2761 611  
E-Mail: info@safegard.ie

IL Shemer Representations  
P.O. Box 296  
56101 Yehud, Israel  
Tel. +972 3 536 51 67  
Telefax +972 3 536 05 81  
E-Mail: shemar@shemerrep.co.il

IN BELIMO Vitek Air Controls  
C-114 Lancelot, First Floor  
S.V. Road, Borivali (West)  
Mumbai 400 092, India  
Tel. +91 22 5695 9439  
Telefax +91 22 2806 2163  
E-Mail: bvac@bom2.vsnl.net.in

IS Hitatækni ehf.  
Langhóltsveg 109  
104 Reykjavík, Iceland  
Tel. +354 5 88 60 70  
Telefax +354 5 88 60 71  
E-Mail: fridmar@hitataekni.is

IT BELIMO Servomotori S.r.l.  
Via Stezzano, 5  
24050 Zanica BG, Italy  
Tel. +39 035 67 26 82  
Telefax +39 035 67 02 00  
E-Mail: info@belimo.it

KR HANMO Corporation  
3rd Floor, Yeosam Bldg. 648-23  
Gangnam-Ku, Seoul, Korea  
Tel. +822 3453 8225  
Telefax +822 3453 8228

LB Energy Center (EC)  
Hamra, Leon Street, Shatilla,  
Bldg. 4th Floor,  
P.O. Box 113-6955  
Beirut, Lebanon  
Tel. +961 (0)1 35 38 23  
Telefax +961 (0)1 35 38 23  
E-Mail: belimome@emirates.net.ae

NL/ BELIMO Servomotoren BV  
BE/ BENELUX  
LU Postbus 300, 8160 AH Epe  
Radeweg 25, 8171 MD Vaassen  
Netherlands  
Tel. +31 5 78 57 68 36  
Telefax +31 5 78 57 69 15  
E-Mail: info@belimo.nl

NO BELIMO Spjeldmotorer A/S  
Konowgate 5  
0192 Oslo 1, Norway  
Tel. +47 22 70 71 71  
Telefax +47 22 70 71 70  
E-Mail: info@belimo.no

PH BELIMO Actuators Philippines  
Rm.# 507 Anita Build., 5th Floor  
1300 Quezon Ave., Cor.South Ave.  
1103 Quezon City, Philippines  
Tel. +63 (2) 373 5440  
Telefax +63 (2) 373 5424  
E-Mail: philippines@belimo.com.hk

RO SC Mano Construct srl  
Str. Cameliei nr 5, sector 1  
Bucuresti, Romania  
Tel. +40 212 126 993  
Telefax +40 212 126 995  
E-Mail: manoconstruct@fx.ro

RU BELIMO Servomotors  
Russia Ltd.  
Nizhnyaya Pervomaiskaya,  
46 Bld. 1, Office 303  
105203 Moscow, Russia  
Tel. +7 095 965 74 64  
Telefax +7 095 965 74 73  
E-Mail: belimo.russia@mtu-net.ru

SE BELIMO Spjällmotorer AB  
Hägerstens Allé 88  
129 37 Hägersten, Sweden  
Tel. +46 (0)8 88 07 00  
Telefax +46 (0)8 97 85 75  
E-Mail: info@belimo.se

SY Philippe A. Jebran  
P.O. Box 7791  
Damascus, Syria  
Tel. +963 11 231 6586  
Telefax +963 11 231 4052  
E-Mail: belimome@emirates.net.ae

TR BELIMO Otomasyon A.S.  
Keyap Sitesi No. 20  
TR-81260 Y.Dudullu  
Istanbul, Turkey  
Tel. +90 216 527 98 70  
Telefax +90 216 527 98 71  
E-Mail: info@belimo.com.tr

TW Chienseng Enterprise Co. Ltd.  
2F, No. 21, Tong Fong Street  
Taipei, Taiwan  
Tel. +886 2 27 08 77 80  
Telefax +886 2 27 02 90 90  
E-Mail: taiwan@belimo.com.hk

UA BELIMO Ukraine S.A.R.  
34-A, Ul. Yurkovskaya, Appt.N°2  
254080 Kiev, Ukraine  
Tel./Telefax +380 44 463 7586  
E-Mail: comaster@belimo.kiev.ua

ZA BELIMO Actuators Southern Africa cc  
P.O. Box 2483  
Alberton 1450, South Africa  
Tel. +27 (0)11 868 5681  
Telefax +27 (0)11 900 2673  
E-Mail: belimo@mega.co.za